Badge Card Beacon

Product Display

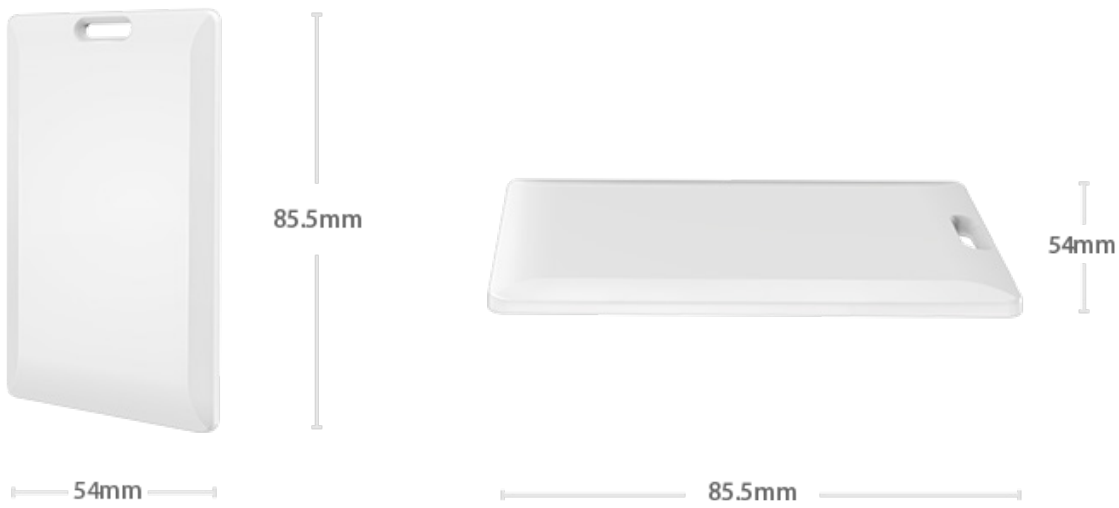

Features

Programmed MiniBeacon standard firmware

Powered by Lithium polymer battery

The max. 100 meters advertising distance

Ultra-low power consumption chipset DA14580 with ARM core

Easy to print the logo on the waterproof case

Specification

Compatibility	Supported ios 7.0+, android 4.3+, Apple iBeacon™ standard, Bluetooth 4.0 (BLE) devices
Battery Lifetime	24 months, Real time battery level notification
Configurable Parameters	UUID, major, minor, device name, password etc., Special configuration APP
Transmission Power Levels	Default setting, 0dBm
Transmission Power Range	T-30dBm to +4dBm
Soft Reboot	Reboot the device via command without any tools
Connection Mode	Advertising mode, Non connectable, Configuration mode, Connectable
Mounting	3M brand adhesive for direct mounting to wall

Parameters

Case Color	White, can be customized
Battery Model	Lithium polymer battery, 1pc x 3.7V
Operation Voltage	1.8-3.9V
Transmission Current	4.5mA (Max.)
Transmission Range	Maximum 100 meters
Antenna	50ohm, on board/PCB Antenna
Accessories	Double adhesive
Net Weight	18.0g, with battery
Size	90 x 60 x 4 mm